

GLOVE BOX REPAIR BRACKET INSTALLATION

- Open glove box & squeeze sides to remove from dashboard
- If still installed, remove the 2 screws (sometimes 1 depending on year) holding glove box latch to dash. See fig 1.

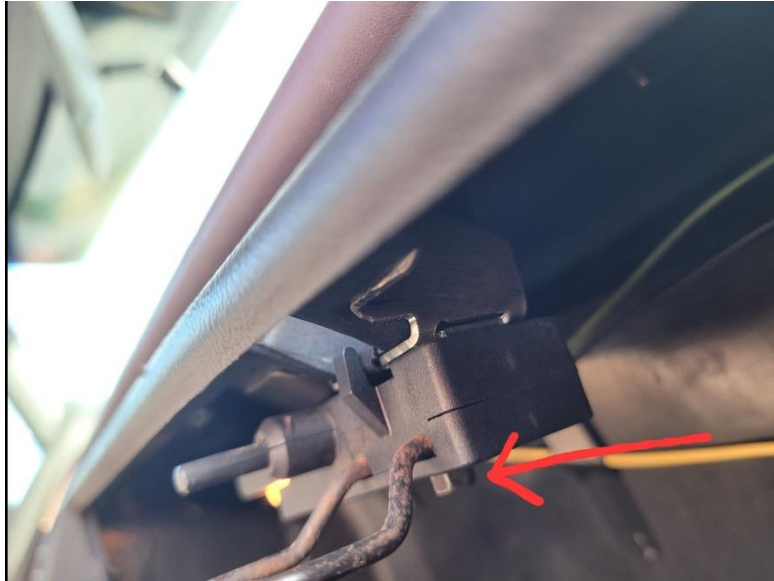


Fig 1

- Remove any broken plastic (as needed) on the base mount of the latch. See Fig 2



Fig 2

- Using an 8th inch drill bit, drill 2 holes in similar location to Fig 3 image



Fig 3

- Hold new part over the broken area with mark it with a pen or the drill bit through the 2 holes just drilled. Marking your own holes like this ensures all holes line up
- Remove part and drill the 2 holes you just marked using 1/8" drill bit.
- Place the part back onto location and verify holes align. Then insert the 2 provided rivets into the holes and using rivet tool (not supplied) crimp the rivets.
- Now install your original J clip to the new part and re install the latch *NEVER OVER TIGHTEN SCREWS
- Install glove box

